THE AMERICAN BUILT-IN UNDERCOUNTER
MARKET LEADER SINCE 1962

PRODUCT COLLECTION

PRODUCT COLLECTION

4 Wine Captain® Models

10 Beverage Centers

14 Glass Door Refrigerators

18 Refrigerators

24 Ice Makers

26 Clear Ice Machines

28 Combo® Models / RF

32 Outdoor

34 Marine / RV

38 36" Custom Models

40 Specifications at a Glance

Henry Uihlein, Founder 1921 - 2011

U-LINE
BUILDING ON OVER 50 YEARS
OF INNOVATION

Henry Jr., Henry, Philip and Richard Uihlein

Building On Three Generations Of Innovation

For over five decades and through three generations, U-Line continues to be the leader in innovation, quality and value in the premium built-in undercounter ice making, refrigeration and wine preservation market. The Uihlein family traces its roots back to southern Germany. In the mid-1800's several family members immigrated to the U.S. and were an instrumental part of a substantial brewery.

In 1962 Henry Uihlein, founded U-Line Corporation as an outgrowth of Ben-Hur Freezer Company and was the first to develop and patent an automatic stand-alone undercounter residential ice maker. His foresight and determination to develop new ideas and to succeed when there were no clear guidelines or solutions are evident today. The newest Uihlein generation continues to build upon the family's innovative legacy at the Milwaukee, Wisconsin based business by providing continuity and vision from which new designs and technology continue to be born.

U-Line has captivated those with an appreciation for the finer things with exceptional functionality, style, inspired innovations and attention to even the smallest details. We are known and respected for our unwavering dedication to product design, quality and selection.

Today the complete U-Line product collection includes Ice Makers, Ice Machines, Wine Captain® Models, Combo® Models, Refrigerator / Freezers, Refrigerators, Drawer Models and Beverage Centers. The U-Line brand offers products in the 1000 Series, 2000 Series and the Modular 3000 Series. The 1000 Series offers a more targeted priced product with appropriate features, while the 2000 Series offers upscale features, advanced technology and specialized product families. Our Modular 3000 Series provides sleek design and versatile temperature settings with our U-Select® Control. U-Line's approach to its breadth of products, multiple price points and features allows a choice and product that will fit any lifestyle.

Corporate headquarters have been based in Milwaukee since 1962 and a West Coast office was established in Laguna Beach, California in 2006. U-Line has shipped product to five continents for over two decades. The opening of a European office in 2012, marks U-Line's ongoing commitment to its continued growth and expansion as it becomes firmly established in the global marketplace.

Designed, Engineered and Assembled in WI, USA

Designed for Preservation.

As the first North American appliance manufacturer to develop a residential wine preservation unit, we understand proper storage is critical for wine.

U-Line Wine Captain® Models manage and maintain stable temperature, provide protection from light and harmful UV rays, virtually eliminate vibration and maintain a suitable level of humidity; all important elements in maximizing the preservation of wine.

U-Line has the widest offering of Wine Captain® Models, as well as varying temperature management systems to best accommodate your wine preservation needs and personal taste.

1985 First U.S. Residential Wine Captain® Model

Wine Captain® Models

Shown in image: U-Line 3036WCWC Overlay Model with integrated toe-kick

Wine Captain® Models

	1075WC	1115WC	1175WC	2115WC	2175WCC	2275ZWC	3018WC	3024WC	3036WCWC
Series Number / Width	1000 Series / 24"	1000 Series / 15"	1000 Series / 24"	2000 Series / 15"	2000 Series / 24"	2000 Series / 24"	3000 Series / 18"	3000 Series / 24"	3000 Series / 36"
Wine Bottle Capacity (.75L)	48	24	48	24	48	43	31	43	62
Available Finishes	Stainless	Stainless, Black	Stainless, Black	Stainless, Overlay	Stainless, Overlay, Solid Door Overlay	Stainless, Overlay Solid Door Overlay	Stainless, Overlay	Stainless, Overlay	Stainless, Overlay
Door Swing Options	Reversible	Reversible	Reversible	Reversible	Reversible	Reversible	Stainless and Overlay: Left or Right Hinged	Stainless and Overlay: Left or Right Hinged	N/A
Stainless Door Type	Stainless wrap door with black end caps	Stainless wrap door with black end caps	Stainless wrap door with black end caps	Full wrap stainless door	Full wrap stainless door	Full wrap stainless door	Full wrap stainless door	Full wrap stainless door	Full wrap stainless door
Wine Rack Details	Black powder coated, 3/4 extension racks	Black powder coated, 3/4 extension racks	Black powder coated, 3/4 extension racks	Black vinyl coated, full extension racks	Black vinyl coated, full extension racks	Black vinyl coated, full extension racks	Black vinyl coated, full extension racks	Black vinyl coated, full extension racks	Black vinyl coated, full extension racks
Temperature Management System	Mechanically Controlled Triple Zone	Digitally Controlled Triple Zone	Digitally Controlled Triple Zone	Digitally Controlled Triple Zone	Digitally Controlled Single Zone	Independently Controlled Dual Zone	Digitally Controlled Single Zone	Digitally Controlled Single Zone	Independently Controlled Dual Zone
Temperature Range	40 to 60°F	40 to 60°F	40 to 60°F	40 to 60°F	38 to 60°F	34 to 60°F	38 to 65°F	38 to 65°F	38 to 65°F
Controls Type	Mechanical dial	Touch pad digital	Touch pad digital	Touch pad digital	Touch pad digital	Touch pad digital	U-Select® Control	U-Select® Control	U-Select® Control
Sabbath / Blackout Mode	N/A	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Toe Kick Accepts Overlay/Adjustable	N/A	N/A	N/A	Yes/No	Yes/No	Yes/No	Yes/Adjustable	Yes/Adjustable	Yes/Adjustable
UL Listing	Residential	Residential / Commercial	Residential / Commercial	Residential / Commercial	Residential / Commercial	Residential	Residential	Residential	Residential

Wine Captain® Models

1000 SERIES
WINE CAPTAIN® MODEL FEATURES

- Solid beech wood trimmed, 3/4 extension black powder coated wine racks
- Temperature range from 40 - 60°F
- Stainless model ships with our commercial stainless steel handle and is interchangeable with our professional handle
- LowE coated, argon gas filled thermopane glass door provides protection from harmful UV light
- Two wine racks accommodate larger diameter wine bottles
- Field Reversible door (except lock models)

1075WC

- Wine bottle capacity up to 48 bottles (.75L)
- Lighted white interior
- Mechanically controlled triple temperature zone
- Lock model available, must be ordered left or right-hand hinged

1115WC

- Wine bottle capacity up to 24 bottles (.75L)
- Lighted black interior
- Touch pad digital control featuring easy view command center
- Digitally controlled triple temperature zone
- Underwriters Laboratory (UL) Residential and Commercial Listing

1175WC

- Wine bottle capacity up to 48 bottles (.75L)
- Lighted black interior
- Touch pad digital control featuring easy view command center
- Digitally controlled triple temperature zone
- Underwriters Laboratory (UL) Residential and Commercial Listing
- Lock model available, must be ordered left or right-hand hinged

THREE ZONES OF PRESERVATION

The triple zone design of the 1000 Series allows for optimal preservation of your white, red and sparkling wines in a single unit.

Stainless

Stainless Black

Stainless Black

For product dimensions and technical data, see page 42.

Cabernet Sauvignon

Deep colored, with high levels of tannin and acidity, Cabernet Sauvignon is good for aging. Optimal preservation temperatures are between 55°F and 65°F to store Cabernets and have them ready for dinner with friends.

2000 SERIES
WINE CAPTAIN® MODEL FEATURES

- Solid beech wood trimmed, full extension black vinyl coated wine racks
- Touch digital control featuring easy view command center
- Stainless model ships with our commercial stainless steel handle and is interchangeable with our professional handle, either one can be ordered separately for use on an overlay model
- LowE coated, argon gas filled thermopane glass door provides protection from harmful UV light
- Two wine racks accommodate larger diameter wine bottles

2115WC

- Wine bottle capacity up to 24 bottles (.75L)
- Digitally controlled triple temperature zone
- Temperature range from 40 - 60°F
- Underwriters Laboratory (UL) Residential and Commercial Listing

2175WCC

- Wine bottle capacity up to 48 bottles (.75L)
- Digitally controlled single zone convection cooling system
- Temperature setting from 38 - 60°F
- Solid door overlay model available
- Underwriters Laboratory (UL) Residential and Commercial Listing
- Lock model available, field reversible

2275ZWC

- Wine bottle capacity up to 43 bottles (.75L)
- Digitally controlled, dual-zone convection cooling system, temperature can be set and controlled independently
- Temperature setting from 34 - 60°F
- Solid door overlay model available
- Lock model available, field reversible

2000 SERIES

Full extension slide-out wine racks with black vinyl coating allow for easy access and prevent bottles from sliding.

Stainless Overlay

Stainless Overlay Solid Overlay

Stainless Overlay Solid Overlay

For product dimensions and technical data, see page 42.

Chardonnay

Medium to full bodied, Chardonnay is best served lightly chilled. Optimal preservation temperatures are between 45°F and 55°F to store Chardonnay and keep it crisp, bright and ready for an afternoon with friends.

Wine Captain® Models

MODULAR 3000 SERIES
WINE CAPTAIN® MODEL FEATURES

- Black interior with LED theater lighting
- Solid beech wood, graphite finished, full-extension black vinyl coated wine racks
- U-Select® Control: Integrated OLED display with intuitive user interface controls ergonomically located on top of door
- Temperature setting from 38 - 65°F
- All Modular 3000 Series Wine Captain® Models maintain temperature to within 1°F of set point to maximize preservation
- Rubber mounted compressor virtually eliminates vibration
- Stainless model ships with our commercial stainless steel handle and is interchangeable with our professional handle, either one can be ordered separately for use on an overlay model
- LowE coated, argon gas filled thermopane glass door provides protection from harmful UV light
- Robust, concealed and covered hinges with built-in door stop and closer
- Adjustable, front-to-back and up-and-down, toe-kick provides seamless integration
- Front adjustable rear leveling legs simplifies installation
- The fourth and fifth wine racks accommodate larger diameter wine bottles

3018WC

- Wine bottle capacity up to 31 bottles (.75L)
- Digitally controlled, single-zone convection cooling system
- Lock model available
- Must be ordered left or right-hand hinged
- To create a custom 36" model using one of our 36" Custom Flange Kits - see page 39 for details

Stainless Overlay

3024WC

- Wine bottle capacity up to 43 bottles (.75L)
- Digitally controlled, single-zone convection cooling system
- Must be ordered left or right-hand hinged

Stainless Overlay

3036WCWC

- Wine bottle capacity up to 62 bottles (.75L)
- Digitally controlled, dual-zone convection cooling system, temperature can be set and controlled independently
- Lock model available

Stainless Overlay

For product dimensions and technical data, see page 40.

Sparkling Wine

Always serve well chilled. Optimal preservation temperatures are between 44°F and 48°F to ensure your sparkling wine is always celebration ready.

U-LINE

We understand proper storage is critical for wine. The U-Select® Control available in the Modular 3000 Series Wine Captain® Models creates cellar-like conditions to maximize the preservation of wine. With digitally controlled convection cooling, these models consistently maintain a precise and stable environment, within 1°F of the set point temperature, providing optimal preservation for your prized Cabernet or a bottle of fine Champagne.

Shown in image: U-Line 3024WC, 3024WC and 3024RGL Overlay Models

Refreshingly Cool.

Designed to accommodate a variety of different sizes and types of beverages, U-Line Beverage Centers are the perfect accompaniment to any room, making entertaining easier and life more enjoyable while putting convenience within arm's reach.

Unlike other products and simply stated, U-Line Beverage Centers keep your beverages cool; down to 34°F cool. Our models with convection cooling technology rapidly take items from room temperature to your desired cool temperature.

LowE coated and Argon gas filled glass thermopanes provide enhanced temperature stability. U-Line Beverage Centers are the perfect place to keep your beer and sodas chilled and your wines preserved.

2004 U-Line expands its product offering with the 75BEV Beverage Center

Beverage Centers

Shown in image: U-Line 3024BEV and 3024RF

	1075BEV	1175BEVSS	2175BEVC	3024BEV	3036BVWC
Series Number / Width	1000 Series / 24"	1000 Series / 24"	2000 Series / 24"	3000 Series / 24"	3000 Series / 36"
Wine Bottle Capacity (.75L)	16	16	16	11	31
Overall Capacity (Cu. Ft.)	5.6	5.6	5.6	4.9	7.1
Available Finishes	Stainless	Stainless	Stainless, Overlay, Solid Door Overlay	Stainless, Overlay	Stainless, Overlay
Door Swing Options	Reversible	Reversible	Reversible	Stainless and Overlay: Left or Right Hinged	N/A
Stainless Door Type	Stainless wrap door with black end caps	Stainless wrap door with black end caps	Full stainless wrap, Overlay, Solid Door Overlay	Full stainless wrap door	Full stainless wrap door
Wine Rack Details	Black powder coated, 3/4 extension racks	Black powder coated, 3/4 extension racks	Black vinyl coated, full extension racks	Black vinyl coated, full extension racks	Black vinyl coated, full extension racks
Tempered Glass Shelves	2	2	2	3	4
Temperature Management System	Mechanically Controlled Double Zone	Digitally Controlled Double Zone	Digitally Controlled Convection Cooling	Digitally Controlled Convection Cooling	Independently Controlled Dual Zone
Temperature Range	34 to 45°F	34 to 45°F	34 to 45°F	34 to 70°F	38 to 65°F - Wine Captain® Model Side 34 to 70°F - Beverage Center Side
Controls Type	Mechanical	Touch pad digital	Touch pad digital	U-Select® Control	U-Select® Control
Sabbath / Blackout Mode	N/A	Yes	Yes	Yes	Yes
Toe Kick Accepts Overlay/Adjustable	N/A	N/A	Yes/No	Yes/Adjustable	Yes/Adjustable
UL Listing	Residential	Residential / Commercial	Residential / Commercial	Residential	Residential

1000 AND 2000 SERIES BEVERAGE CENTER FEATURES

- Wine bottle capacity up to 16 bottles (.75L)
- Bottle/can capacities: 48 - 12 oz bottles and 65 - 12 oz cans
- Two solid beech wood trimmed, 3/4 extension black powder coated wine racks
- Stainless model ships with our commercial stainless steel handle and is interchangeable with our professional handle
- LowE coated, argon gas filled thermopane glass door provides protection from harmful UV light
- Field reversible door

1075BEV

- Refrigeration capacity of 5.6 cubic feet
- Mechanically controlled double temperature zone
- Temperature range from 34 - 45°F
- Lighted white interior
- Lock model available, must be ordered left or right-hand hinged

1175BEVSS

- Refrigeration capacity of 5.6 cubic feet
- Touch pad digitally controlled double zone
- Temperature range from 34 - 45°F
- Lighted black interior
- Underwriters Laboratory (UL) Residential and Commercial Listing
- Lock model available, must be ordered left or right-hand hinged

2175BEVC

- Refrigeration capacity of 5.6 cubic feet
- Digitally controlled, single-zone convection cooling system
- Temperature setting from 34 - 45°F
- Underwriters Laboratory (UL) Residential and Commercial Listing

1000 SERIES

With a temperature range of 34 - 45°F and two separate zones, its easy to keep your wine and your other beverages at their perfect temperatures.

Stainless Lock Models

Stainless Lock Models

Stainless Overlay Solid Overlay

Perfectly Chilled

U-Line Beverage Centers chill to 34°F ensuring there is always a frosty beverage at hand.

For product dimensions and technical data, see page 42.

MODULAR 3000 SERIES BEVERAGE CENTER FEATURES

- Black interior with LED theater lighting
- U-Select® Control: Integrated OLED display with intuitive user interface controls ergonomically located on top of door
- Temperature range from 34 - 70°F and 38 - 65°F in the wine zone
- Three adjustable tempered glass shelves with seven position provide optimal flexibility
- Stainless model ships with our commercial stainless steel handle and is interchangeable with our professional handle, either one can be ordered separately for use on an overlay model
- LowE coated, argon gas filled thermopane glass door provides protection from harmful UV light
- Robust, concealed hinges with built-in door stop and closer
- Adjustable, front-to-back and up-and-down, toe-kick provides seamless integration
- Front adjustable rear leveling legs simplifies installation

MODULAR 3000 SERIES

With two wine racks, capable of storing larger diameter bottles, and three adjustable tempered glass shelves, the U-Line Modular 3000 Series Beverage Centers are built for flexibility.

For product dimensions and technical data, see page 40.

3024BEV

- Refrigeration capacity of 4.7 cubic feet for overlay and 4.9 cubic feet for stainless models
- Bottle/can capacities: 42 - 12 oz bottles or 126 - 12 oz cans
- Wine bottle capacity up to 11 bottles (.75L)
- Digitally controlled, single-zone convection cooling system
- Two solid beech wood, graphite finished, full-extension, black vinyl coated wine racks
- Must be ordered left or right-hand hinged

Stainless Overlay

3036BVWC

- Refrigeration capacity of 3.4 cubic feet for overlay and 3.6 cubic feet for stainless models
- Bottle/can capacities: 60 - 12 oz bottles or 127 - 12 oz cans
- Wine bottle capacity up to 31 bottles (.75L)
- Digitally controlled, dual-zone convection cooling system, temperature can be set and controlled independently
- Seven solid beech wood, graphite finished, full-extension, black vinyl coated wine racks
- Full-extension, slide-out crisper drawer removable for easy cleaning
- Total of 4 glass shelves
- Lock model available

Stainless Overlay

Quick Chill

With the U-Select® Control Quick Chill mode, available on the Modular 3000 Series models, quickly brings your beverages to the desired temperature.

Optimal Preservation in a Glass Door Refrigerator.

Having pioneered the residential undercounter glass door refrigerator, U-Line knows how to keep things cool. All U-Line glass door refrigerators utilize our convection cooling system providing the ability to take items from room temperature to 34°F more rapidly.

With varying shelving options and adjustment capabilities, U-Line glass door refrigerators have the design and capacity for optimizing your food and beverage storage and preservation needs.

2010 U-Line pioneered the residential undercounter glass door refrigerator.

Glass Door Refrigerators

Shown in image:
3018WC and 36" Glass Door Refrigerator / Refrigerator
(3018RGL and 3018RF Overlay Models and Custom Flange Kit)

	ADA24RGL	2175RCG	3018RGL	3024RGL	3036RRGL
Series Number / Width	ADA Series / 24"	2000 Series / 24"	3000 Series / 18"	3000 Series / 24"	3000 Series / 36"
Overall Capacity (Cu. Ft.)	5.3	5.4	3.6	4.9	7.1
Available Finishes	Stainless, Black	Stainless, Overlay	Stainless, Overlay	Stainless, Overlay	Stainless, Overlay
Door Swing Options	Stainless: Left or Right Hinged Black: Reversible	Reversible	Left or Right Hinged	Left or Right Hinged	N/A
Stainless Door Type	Stainless wrap door with black end caps	Full stainless wrap	Full stainless wrap	Full stainless wrap	Full stainless wrap
Wine Bottle Capacity (.75L)	N/A	N/A	N/A	N/A	N/A
Shelves	4 - heavy duty chrome wire	3 - tempered glass	4 - tempered glass	4 - tempered glass	8 - tempered glass
Crisper Drawer	N/A	1	1	1	2
Temperature Management System	Digitally Controlled Convection Cooling	Digitally Controlled Convection Cooling	Digitally Controlled Convection Cooling	Digitally Controlled Convection Cooling	Independently Controlled Dual Zone
Temperature Range	34 to 45°F	34 to 45°F	34 to 70°F	34 to 70°F	34 to 70°F
Controls Type	Touch pad digital	Touch pad digital	U-Select® Control	U-Select® Control	U-Select® Control
Sabbath / Blackout Mode	Yes	Yes	Yes	Yes	Yes
Toe Kick Accepts Overlay/ Adjustable	N/A	Yes/No	Yes/Adjustable	Yes/Adjustable	Yes/Adjustable
UL Listing	Residential / Commercial	Residential / Commercial	Residential	Residential	Residential

For solid door refrigerator models see page 19. For outdoor refrigerator models see page 33.

ADA AND 2000 SERIES GLASS DOOR REFRIGERATOR FEATURES

- Temperature setting from 34 - 45°F
- Digitally controlled, single-zone convection cooling system
- Stainless model ships with our commercial stainless steel handle and is interchangeable with our professional handle, either one can be ordered separately for use on an overlay model
- LowE coated, argon gas filled thermopane glass door provides protection from harmful UV light
- Underwriters Laboratory (UL) Residential and Commercial Listing

ADA24RGL

- Refrigeration capacity of 5.3 cubic feet
- Bottle/can capacities: 7-1/2 cases - 12 oz cans
- 4 full depth, removable, chrome plated heavy duty wire shelves
- Stainless model must be ordered left or right-hand hinged
- ADA Height Compliant - Fits underneath a 34" height countertop

2175RCG

- Refrigeration capacity of 5.4 cubic feet
- Bottle/can capacities: 112 - 12 oz bottles or 175 - 12 oz cans
- Three adjustable tempered glass shelves with 11 adjustment positions

GLASS DOOR REFRIGERATORS

The convection cooling system in all glass door refrigerators quickly chills your food and beverages to the desired temperature.

Stainless

Black

Stainless

Overlay

Just Right

Whether it's dedicated storage for wine and beverages or extra refrigeration within arm's reach, U-Line has a model that is just right.

For product dimensions and technical data, see page 42.

MODULAR 3000 SERIES GLASS DOOR REFRIGERATOR FEATURES

- Black interior with LED theater lighting
- U-Select® Control: Integrated OLED display with intuitive user interface controls ergonomically located on top of the door
- Temperature setting from 34 - 70°F
- Full-extension, slide-out crisper drawer(s) removable for easy cleaning
- Stainless model ships with our commercial stainless steel handle and is interchangeable with our professional handle, either one can be ordered separately for use on an overlay model
- LowE coated, argon gas filled thermopane glass door provides protection from harmful UV light
- Robust, concealed and covered hinges with built-in door stop and closer
- Adjustable, front-to-back and up-and-down, toe-kick provides seamless integration
- Front adjustable rear leveling legs simplifies installation

ADAPTABLE STORAGE

With 11 different positions for the tempered glass shelves, the space can be customized for taller items. If it's a can or a long neck, a juice box or bottle of soda, the glass door refrigerator is ready to accommodate.

For product dimensions and technical data, see page 41.

3018RGL

- Refrigeration capacity of 3.4 cubic feet for overlay and 3.6 cubic feet for stainless models
- Bottle/can capacities: 60 - 12 oz bottles or 127 - 12 oz cans
- Digitally controlled, single-zone convection cooling system
- Three adjustable tempered glass shelves with 11 adjustment positions
- Total of 4 glass shelves
- Must be ordered left or right-hand hinged
- Lock model available
- To create a custom 36" model using one of our 36" Custom Flange Kits - see page 39 for details

Stainless Overlay

3024RGL

- Refrigeration capacity of 4.7 cubic feet for overlay and 4.9 cubic feet for stainless models
- Bottle/can capacities: 84 - 12 oz bottles or 168 - 12 oz cans
- Digitally controlled, single-zone convection cooling system
- Three adjustable tempered glass shelves with 11 adjustment positions
- Total of 4 glass shelves
- Must be ordered left or right-hand hinged

Stainless Overlay

3036RRGL

- Refrigeration capacity of 6.7 cubic feet for overlay and 7.1 cubic feet for stainless models
- Bottle/can capacities: 120 - 12 oz bottles or 254 - 12 oz cans
- Digitally controlled, dual-zone convection cooling system. Temperature range can be set and controlled independently.
- Six adjustable tempered glass shelves with 11 adjustment positions
- Total of 8 glass shelves
- Lock model available

Stainless Overlay

Keeping it Fresh

Utilize the full-extension slide-out crisper drawer to keep your fruits and vegetables fresh longer and tasting better.

Efficient Undercounter Convenience.

Undercounter refrigerators are the ultimate in point-of-use convenience, giving you what you want, where you need it. Place a refrigerator wherever it's needed: next to a food preparation area, in a home office, your child's playroom, in your bar or home gym - even in your bathroom to keep cosmetics and medications cool.

Featuring the widest selection of undercounter refrigerators, U-Line offers the most usable refrigeration capacity, bright and open interiors, varying shelf locations and adjustability, crisper drawers and generous storage. Committed to efficiency in design and performance, U-Line offers a wide selection of ENERGY STAR® efficient undercounter refrigerators.

1950's Ben-Hur Freezer - Predecessor to U-Line Refrigeration

Shown in image: U-Line 3024RF and 3024RF Overlay Models with integrated toe-kick

	29R	ADA24R	1115R	1175R	2115R	2175RC	2275DWRC	3018RF	3024RF	3036RR
Series Number / Width	ADA Series / 21"	ADA Series / 24"	1000 Series / 15"	1000 Series / 24"	2000 Series / 15"	2000 Series / 24"	2000 Series / 24"	3000 Series / 18"	3000 Series / 24"	3000 Series / 36"
Overall Capacity (Cu. Ft.)	3.3	5.3	3.0	5.3	3.0	5.2	5.3	3.4	4.8	6.8
Available Finishes	Black, White	Stainless, Black	Stainless, Black	Stainless, Black, White	Stainless, Black, White, Overlay	Stainless, Black, White, Overlay	Stainless, Black, Overlay	Stainless, Overlay	Stainless, Overlay	Stainless, Overlay
Door Swing Options	Reversible	Stainless: Left or Right Hinged Black: Reversible	Stainless: Left or Right Hinged Black: Reversible	Stainless: Left or Right Hinged Black, White: Reversible	Stainless: Left or Right Hinged Black, White: Reversible	Stainless: Left or Right Hinged Black, White: Reversible	Drawer	Stainless and Overlay: Left or Right Hinged	Stainless and Overlay: Left or Right Hinged	N/A
Stainless Door Type	N/A	Stainless wrap door with black end caps	Stainless wrap door with black end caps	Stainless wrap door with black end caps	Full stainless wrap	Full stainless wrap	Full stainless wrap	Full stainless wrap	Full stainless wrap	Full stainless wrap
Storage Bins	3 / In door	N/A	2 / In door	2 / In door	2 / In door	2 / In door	2	3	3	6
Shelves	3 - tempered glass	4 - heavy duty chrome wire	3 - tempered glass	3 - tempered glass	3 - tempered glass	3 - tempered glass	N/A	N/A	N/A	N/A
Temperature Management System	Mechanically controlled passive cooling	Digitally controlled convection cooling	Digitally controlled passive cooling	Digitally controlled passive cooling	Digitally controlled passive cooling	Digitally controlled convection cooling	Digitally controlled convection cooling	Digitally controlled convection cooling	Digitally controlled convection cooling	Independently digitally controlled dual-zone
Temperature Range	34 to 45°F	34 to 45°F	34 to 45°F	34 to 45°F	34 to 45°F	34 to 45°F	34 to 45°F	34 to 70°F	34 to 70°F	34 to 70°F
Controls Type	Mechanical dial	Touch pad digital	Touch pad digital	Touch pad digital	Touch pad digital	Touch pad digital	Touch pad digital	U-Select® Control	U-Select® Control	U-Select® Control
Sabbath / Blackout Mode	N/A	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Toe Kick Accepts Overlay/ Adjustable	N/A	N/A	N/A	N/A	Yes/No	Yes/No	Yes/No	Yes/Adjustable	Yes/Adjustable	Yes/Adjustable
ENERGY STAR®/ CEE Rating	ENERGY STAR® / Tier 1	ENERGY STAR® / Tier 3		ENERGY STAR® / Tier 3		ENERGY STAR® / Tier 3		ENERGY STAR® / Tier 3	ENERGY STAR® / Tier 1	
UL Listing	Residential	Residential / Commercial	Residential / Commercial	Residential / Commercial	Residential / Commercial	Residential / Commercial	Residential / Commercial	Residential	Residential	Residential

For outdoor refrigerator models see page 33. For glass door refrigerator models see page 15.

ADA SERIES REFRIGERATOR FEATURES

- Temperature range from 34 - 45°F
- ADA Height Compliant - Fits underneath a 34" height countertop

29R

- Refrigeration capacity of 3.3 cubic feet
- Mechanical dial control
- Mechanically controlled, single-zone passive cooling system
- Three adjustable tempered glass shelves with 11 adjustment positions
- Non-lock models will accept a 1/4" insert panel
- ENERGY STAR® and CEE Tier 1 rated
- Lock model available

CEE Tier 1

Black White

ADA24R

- Refrigeration capacity of 5.3 cubic feet
- Digitally controlled, single-zone convection cooling system
- Solid black door is field reversible and will accept a 1/4" insert panel
- 4 full depth, removable, chrome plated heavy duty wire shelves
- Stainless model ships with our commercial stainless steel handle and is interchangeable with our professional handle
- Underwriters Laboratory (UL) Residential and Commercial Listing
- ENERGY STAR® and CEE Tier 3 rated
- Door lock standard on all models

CEE Tier 3

Stainless Black

ADA MODELS

U-Line ADA Models are ADA height compliant, providing easy access and flexible storage and meeting the requirement of fitting underneath a 34" height countertop.

Energy Efficient

The U-Line 29R, 1175R, 2175RC, ADA24R, 3018RF and 3024RF are ENERGY STAR® and CEE rated.

For product dimensions and technical data, see page 43.

1000 SERIES REFRIGERATOR FEATURES

- Temperature range from 34 - 45°F
- Digitally controlled, single-zone passive cooling system
- Stainless model ships with our commercial stainless steel handle and is interchangeable with our professional handle,
- Touch pad digital control featuring easy view command center
- Three adjustable tempered glass shelves
- Two in-door storage bins, easily removed for cleaning
- Underwriters Laboratory (UL) Residential and Commercial Listing

1115R

- Refrigeration capacity of 3.0 cubic feet
- Black model will accept a 1/4" insert panel
- Lighted white interior

1175R

- Refrigeration capacity of 5.3 cubic feet
- Black and white non-lock models will accept a 1/4" insert panel
- Lighted white interior
- Lock model available, field reversible
- ENERGY STAR® and CEE Tier 3 rated

ROOM FOR IT ALL

From juice boxes to sports drinks to an afternoon snack of fruit and cheese, there is plenty of space for everything you need.

Stainless Black

Stainless Black White

For product dimensions and technical data, see page 42.

The Perfect Size

With 15", 18", 21", 24" and 36" sizes, there is a U-Line undercounter refrigerator for any space.

2000 SERIES REFRIGERATOR FEATURES

- Temperature setting from 34 - 45°F
- Stainless model ships with our commercial stainless steel handle and is interchangeable with our professional handle, either one can be ordered separately for use on an overlay model (except 2275DWRC models)
- Underwriters Laboratory (UL) Residential and Commercial Listing

2115R

- Refrigeration capacity of 3.0 cubic feet
- Digitally controlled, single-zone passive cooling system
- Three adjustable tempered glass shelves
- Black and white models will accept a 1/4" insert panel

2175RC

- Refrigeration capacity of 5.2 cubic feet
- Digitally controlled, single-zone convection cooling system
- Three adjustable tempered glass shelves
- Black and white models will accept a 1/4" insert panel
- ENERGY STAR® and CEE Tier 3 rated

2275DWRC

- Refrigeration capacity of 5.3 cubic feet
- Digitally controlled, single-zone convection cooling system
- Stainless steel drawer construction
- Overlay can be converted to a black model with purchase of two black handle kits (P/N 26070-01-S)
- Top bin organizer and crisper drawer included
- Optional slide and divide organizing system (must be ordered separately)

2115R & 2175RC

Three tempered glass shelves provide ample storage and accommodate taller items.

Stainless Black

White Overlay

Stainless Black

White Overlay

Stainless Black

Overlay

For product dimensions and technical data, see pages 42 and 43.

Flexible Convenience

If its extra space in the prep area or a place for your high end cosmetics in the bathroom, U-Line refrigerators go where you need them most.

MODULAR 3000 SERIES REFRIGERATOR FEATURES

- Black interior with LED theater lighting
- U-Select® Control: Integrated OLED display with intuitive user interface controls ergonomically located on top of door
- Temperature setting from 34 - 70°F
- Middle bin has two possible positions and comes with a removable glass shelf
- Lower drawer bins fit one-gallon containers with additional space for more storage
- Stainless model ships with our commercial stainless steel handle and is interchangeable with our professional handle, either one can be ordered separately for use on an overlay model
- Optional slide and divide organizing system (must be ordered separately)
- Robust, concealed hinges with built-in door stop and closer
- Adjustable, front-to-back and up-and-down, toe-kick provides seamless integration
- Front adjustable rear leveling legs simplifies installation

U-SELECT® CONTROL

The U-Select® Control for refrigerator models is programmed with five distinct modes. Each mode has an optimal set point within a designated temperature range that can also be adjusted for personal preference.

For product dimensions and technical data, see page 41.

3018RF

- Refrigeration capacity of 3.4 cubic feet
- Digitally controlled, single-zone convection cooling system
- Three full-extension, slide-out drawer bins are removable for easy cleaning
- Must be ordered left or right-hand hinged
- ENERGY STAR® and CEE Tier 3 rated
- To create a custom 36" model using one of our 36" Custom Flange Kits - see page 39 for details

Stainless

Overlay

3024RF

- Refrigeration capacity of 4.8 cubic feet
- Digitally controlled, single-zone convection cooling system
- Three full-extension, slide-out drawer bins are removable for easy cleaning
- Must be ordered left or right-hand hinged
- ENERGY STAR® and CEE Tier 1 rated

Stainless

Overlay

3036RR

- Refrigeration capacity of 6.8 cubic feet
- Digitally controlled, dual-zone convection cooling system, temperature can be set and controlled independently
- Six full-extension, slide-out drawer bins are removable for easy cleaning

Stainless

Overlay

Room for the Big Stuff

The lower drawer bin has the capacity to store 2 - one gallon containers with room for more.

Compact and Convenient.

When Henry Uihlein founded the U-Line Corporation in 1962 as an outgrowth of the Ben-Hur Freezer Company, the initial product manufactured was the industry's first undercounter ice maker. Today, the U-Line crescent ice maker continues to be the leader in its class. Our crescent ice makers use less than 3 gallons of water to produce up to 25 lbs of ice daily - a rate that is approximately four times greater than what the average household refrigerator produces.

With no drain required, our crescent ice makers are easy and convenient to install. Given the low ice production of full size refrigerators, the U-Line Ice Maker ensures you always have enough ice for holidays and entertaining.

1962 First Undercounter Ice Maker

Ice Makers

Shown in image: U-Line BI2115 Overlay Model

	BI95	BI98	ADA15IM	BI2115
Series Number / Width	ADA Series / 14"	ADA Series / 15"	ADA Series / 15"	2000 Series / 15"
Maximum Daily Ice Production / Storage (lbs)	23 / 12	25 / 25	25 / 25	25 / 25
Ice Cube Type	Crescent	Crescent	Crescent	Crescent
Available Finishes / Door Type	Black / White with integrated handle	Black / White with integrated handle	Black, stainless wrap with black end caps	Black, White, Overlay or full stainless wrap
Door Swing Options	Reversible	Reversible	Stainless: Left or Right Hinged Black: Reversible	Stainless: Left or Right Hinged Black, White: Reversible
Controls Type	Mechanical	Mechanical	Mechanical	Mechanical
Defrost Technology	Manual	Manual	Manual	Manual
Toe Kick Accepts Overlay	N/A	N/A	N/A	Yes
UL Listing	Residential	Residential	Residential/ Commercial	Residential/ Commercial

Black White **BI95**

- All black and white models accept a 1/4" insert panel
- ADA Height Compliant - Fits underneath a 34" height countertop

Black White **BI98**

- All black and white models accept a 1/4" insert panel
- ADA Height Compliant - Fits underneath a 34" height countertop

Stainless Black **ADA15IM**

- Black model accepts a 1/4" insert panel
- Stainless model ships with our commercial stainless steel handle and is interchangeable with our professional handle
- ADA Height Compliant - Fits underneath a 34" height countertop
- Underwriters Laboratory (UL) Residential and Commercial Listing

Stainless Black White Overlay **BI2115**

- Optional full overlay panel on black and white models with purchase of overlay kit
- Stainless model ships with our commercial stainless steel handle and is interchangeable with our professional handle, either one can be ordered separately for use on an overlay model
- Underwriters Laboratory (UL) Residential and Commercial Listing

For product dimensions and technical data, see page 43.
For outdoor ice maker and ice machine models see page 33

Keeping it Cool

No ice shortages here - produce up to 25 lbs of crescent ice (1/2" W x 3/4" H 2-1/2" L) per day with no drain required.

Commercial Performance with Residential Style.

Combining superior performance with stylish design, U-Line enlisted America's #1 selling commercial ice machine company to co-develop the Clear Ice Machine. The U-Line Clear Ice Machines boast up to 60 lbs of commercial quality crystal clear ice cubes daily.

All Clear Ice Machine models require a drain. If you cannot install the unit in an area with proper access to a drain, the Clear Ice Machines can be ordered with our sealed and permanently lubricated P60 drain pump installed. All units ship with a factory installed drain line to ensure proper installation and optimal performance.

Our patented clear ice making process provides the perfect balance of high ice production, quiet operation and easy cleaning.

1998 Patented Clear Ice Machine

Clear Ice Machines

Shown in image: U-Line 3024BEV and 3018CLR Overlay Models

INTERIOR DESIGN BEST OF YEAR HONOREE 2012

	CLR2160	3018CLR
Series Number / Width	2000 Series / 15"	3000 Series / 18"
Maximum Daily Ice Production / Storage (lbs)	60 / 30	60 / 30
Ice Cube Type	Crystal Clear	Crystal Clear
Available Finishes / Door Type	Black, White, Overlay or full stainless wrap	Stainless, Overlay
Door Swing	*Stainless*: Left or Right Hinged *Black*, *White*: Reversible	*Stainless and Overlay*: Left or Right Hinged
Drain Required	Yes	Yes
Controls Type	Touch pad digital	U-Select® Control
Sabbath / Blackout Mode	Yes	Yes
Defrost Technology	Frost-Free	Frost-Free
Toe Kick Accepts Overlay	Yes	Yes/Adjustable

CLEAR ICE MACHINE FEATURES

- Drain required; unit ships with a factory installed drain line to ensure proper installation and optimal performance
- Order with or without factory installed enhanced and quieter P60 drain pump
- Daily ice rate - up to 60 lbs of 7/8" crystal clear ice cubes
- Ice storage capacity - up to 30 lbs
- Customize clear ice cube thickness
- Clean indicator alert
- Silent Mode temporarily suspends ice making for three hours
- Heavy duty ice scoop included
- Stainless model ships with our commercial stainless steel handle and is interchangeable with our professional handle, either one can be ordered separately for use on an overlay model

Stainless Black White Overlay **CLR2160**

Stainless Overlay **3018CLR**

- U-Select® Control: Integrated OLED display with intuitive user interface controls ergonomically located on top of door
- Adjustable, front-to-back and up-and-down, toe-kick provides seamless installation
- Front adjustable rear leveling legs simplifies installation
- To create a custom 36" model using one of our 36" Custom Ice Flange Kits - see page 39 for details

For product dimensions and technical data, see page 40 and 43.

Entertainment Ready

Produces 32 crystal clear ice cubes per cycle.

The Ideal Combination of Functionality and Convenience.

U-Line's pursuant innovation led to design and engineering Combo® Model appliances that are feature rich and offer the highest quality and premium styling. Applying versatility and convenience, U-Line combines refrigeration and ice making or refrigeration and freezer capacity into single compact, space saving models.

With varying sizes and configurations, such as the industry exclusive Clear Ice Machine with refrigerator or the Combo® Drawer model with a refrigerator, ice maker and freezer, there is sure to be a model that fits your taste and needs.

1971 First U.S. Residential Combo® Model Ice Maker / Refrigerator

Combo® Models / RF

Shown in image: U-Line CLRCO2175 Overlay Model

Combo® Models / RF

	CO29*	CO29F*	CO1175**	CO2175F***	2175RF*	CLRCO2175	C2275DWR
Series Number / Width	ADA Series / 21"	ADA Series / 21"	1000 Series / 24"	2000 Series / 24"	2000 Series / 24"	2000 Series / 24"	2000 Series / 24"
Refrigerator / Freezer Capacity (Cu. Ft)	2.1	2.1	4.2	4.2	4.2 / 1.5	2.5	3.0 / 2.0
Maximum Daily Ice Production / Storage (lbs)	18 / 13	8 / 13	18 / 13	8 / 13	N/A	40 / 15	6 / 10
Ice Cube Type	Crescent	Crescent	Crescent	Crescent	N/A	Clear	Crescent
Available Finishes	Black	Black, White	Stainless, Black	Stainless, Black, White, Overlay	Stainless, Black, White, Overlay	Stainless, Black, Overlay	Stainless, Black, Overlay
Door Swing Options	Reversible	Reversible	Stainless: Left or Right Hinged Black: Reversible	Stainless: Left or Right Hinged Black, White: Reversible	Stainless: Left or Right Hinged Black, White: Reversible	Stainless: Left or Right Hinged Black: Reversible	N/A
Stainless Door Type	N/A	N/A	Stainless wrap door with black end caps	Full stainless wrap	Full stainless wrap	Full stainless wrap	Full stainless wrap
In-Door Storage Bins	2	2	2	2	2	2	N/A
Tempered Glass Shelves	2	2	3	3	3	3	N/A
Crisper Drawer	N/A	N/A	N/A	1	1	N/A	N/A
Temperature Management System	Mechanically controlled passive cooling	Mechanically controlled convection cooling	Mechanically controlled passive cooling	Digitally controlled convection cooling	Digitally controlled convection cooling	Digitally controlled passive cooling	Digitally controlled convection cooling
Temperature Range	34 to 45°F	34 to 45°F	34 to 45°F	34 to 45°F	34 to 45°F	34 to 45°F	34 to 45°F
Controls Type	Mechanical dial	Mechanical dial	Mechanical dial	Touch digital	Touch digital	Touch digital	Touch digital
Defrost Technology	Manual	Frost-Free	Manual	Frost-Free	Frost-Free	Auto Defrost	Frost-Free
Sabbath / Blackout Mode	N/A	N/A	N/A	Yes	Yes	Yes	Yes
Toe Kick Accepts Overlay	N/A	N/A	N/A	Yes	Yes	Yes	Yes
UL Listing	Residential / Commercial	Residential	Residential	Residential	Residential	Residential	Residential

*When installing a left-hand hinge model, allow for 145 degree door swing to ensure easy removal of ice bin **When installing a left-hand hinge model, allow for 125 degree door swing to ensure easy removal of ice bin
***When installing a left-hand hinge model, allow for 110 degree door swing to ensure easy removal of ice bin

ADA & 1000 SERIES COMBO® MODELS / RF FEATURES

- Ice storage capacity - 13 lbs of crescent ice
- Field reversible door (except CO1175 stainless model)
- 2 in-door storage bins
- Temperature range of 34 - 45°F
- Black model will accept a 1/4" insert panel

CO29

- Refrigeration capacity of 2.1 cubic feet
- Daily ice rate - up to 18 lbs
- Mechanically controlled, single-zone passive cooling system
- ADA Height Compliant - Fits underneath a 34" height countertop
- Manual defrost
- When installing a left-hand hinge model, allow for 145 degree door swing to ensure easy removal of ice bin
- Underwriters Laboratory (UL) Residential and Commercial Listed

CO29F

- Refrigeration capacity of 2.1 cubic feet
- Daily ice rate - up to 8 lbs
- Mechanically controlled, single-zone convection cooling system
- Patented frost-free technology
- ADA Height Compliant - Fits underneath a 34" height countertop
- When installing a left-hand hinge model, allow for 145 degree door swing to ensure easy removal of ice bin

CO1175

- Refrigeration capacity of 4.2 cubic feet
- Daily ice rate - up to 18 lbs
- Mechanically controlled, single-zone passive cooling system
- Stainless model ships with our commercial stainless steel handle and is interchangeable with our professional handle, either one can be ordered separately for use on an overlay model
- Manual defrost
- When installing a left-hand hinge model, allow for 125 degree door swing to ensure easy removal of ice bin

BEST OF BOTH WORLDS

The Combo® Models bring together abundant ice supply with generous refrigeration capacity in the convenience of one unit.

Black

Black White

Stainless Black

No Drain Required

Get the convenience of ever-ready ice, freezer and flexible refrigeration without the need for a drain! Our CO29, CO29F, CO1175, CO2175F and C2275DWR models do not require a drain.

For product dimensions and technical data, see page 43.

2000 SERIES COMBO® MODELS / RF FEATURES

- Touch digital control featuring easy view command center
- Stainless model ships with our commercial stainless steel handle and is interchangeable with our professional handle, either one can be ordered separately for use on an overlay model (except C2275DWRC models)
- Digitally controlled, convection cooling system (except CLRCO2175 models)

CO2175F

- Refrigeration capacity of 4.2 cubic feet
- Ice storage capacity - 13 lbs
- Daily crescent ice rate - up to 8 lbs
- Optional full overlay panel on black and white models with purchase of overlay kit
- Crisper drawer included
- Lighted white interior
- Patented frost-free technology

2175RF

- Refrigeration capacity of 4.2 cubic feet
- Freezer capacity of 1.5 cubic feet
- Freezer temperature: 0 to 5°F
- Optional full overlay panel on black and white models with purchase of overlay kit
- Crisper drawer included
- Lighted white interior
- Patented frost-free technology

CLRCO2175

- Refrigeration capacity of 2.5 cubic feet
- Ice storage capacity - 15 lbs
- Daily Clear ice rate - up to 40 lbs
- Digitally controlled passive cooling system
- Auto defrost
- Drain required; unit ships with a factory installed drain line to ensure proper installation and optimal performance

C2275DWR

- Refrigeration capacity of 3.0 cubic feet
- Freezer capacity of 2.0 cubic feet
- Freezer temperature: 0 to 5°F
- Ice storage capacity - 10 lbs
- Daily crescent ice rate - up to 6 lbs
- Frost-free

IN-DOOR STORAGE

In-door storage on the CO2175F, 2175RF and CLRCO2175 gives you just the extra space you need with quick and easy access.

Stainless Black

White Overlay

Stainless Black

White Overlay

Stainless

Black Overlay

Stainless

Black Overlay

For product dimensions and technical data, see page 43.

Unmatched Innovation

The CLRCO2175 is the only unit available that brings together refrigeration and clear ice capabilities in one single unit!

Elegant Convenience. Rugged Enough for the Outdoors.

Today's entertaining environments extend far beyond the boundaries of the traditional home. Outdoor kitchens and entertaining continue to grow and are leading trends in home design and landscape architecture.

For over 50 years, U-Line products have been used in outdoor applications and continue to be amongst our most popular models. Our outdoor models are fully wrapped in stainless steel to protect from harsh outdoor elements.

These durable outdoor products are UL (Underwriters Laboratory) rated and deemed suitable for outdoor use and come with a specific outdoor warranty.

1962 For over 50 years U-Line has warranted product for outdoor use.

Shown in image: U-Line 2175RSOD Stainless Model

	2115RSOD	2175RSOD	BI2115SOD	CLR2160SOD
Series Number / Width	Outdoor Series / 15"	Outdoor Series / 24"	Outdoor Series / 15"	Outdoor Series / 15"
Overall Capacity (Cu. Ft.)	3.0	5.4		
Maximum Daily Ice Production / Storage (lbs)	N/A	N/A	25 / 25	60 / 30
Ice Cube Type	N/A	N/A	Crescent	Clear
Available Finishes	Stainless door and cabinet	Stainless door and cabinet	Stainless door and cabinet	Stainless door and cabinet
Door Type / Swing Options	Full stainless wrap / left or right hinged	Full stainless wrap / left or right hinged	Full stainless wrap / left or right hinged	Full stainless wrap / left or right hinged
Shelves	3 - tempered glass	3 - tempered glass		
Crisper Drawer	N/A	One	N/A	N/A
Temperature Management System	Digitally controlled passive cooling	Digitally controlled passive cooling		
Temperature Range	34 to 45°F	34 to 45°F		
Controls Type	Touch pad digital	Touch pad digital	Mechanical	Touch pad digital
Sabbath / Blackout Mode	Yes	Yes	N/A	Yes
Defrost Technology	Automatic	Automatic	Manual	Frost-Free
Drain Required	N/A	N/A	Not Required	Drain Required
ENERGY STAR® / CEE Rating		ENERGY STAR® / Tier 3		
UL Listing	Residential / Commercial / Outdoor	Residential / Commercial / Outdoor	Residential / Outdoor	Residential / Outdoor

Stainless **2115RSOD**

- Standard door lock
- Standard professional stainless steel handle is interchangeable with commercial handle option
- Lighted white interior
- Underwriters Laboratory (UL) Residential and Commercial Listing

Stainless **2175RSOD**

- Standard door lock
- Standard professional stainless steel handle is interchangeable with commercial handle option
- Lighted white interior
- Underwriters Laboratory (UL) Residential and Commercial Listing

Stainless **BI2115SOD**

- Uses under 3 gallons of water to produce 25 lbs of ice
- Standard professional stainless steel handle is interchangeable with commercial handle option

Stainless **CLR2160SOD**

- Standard professional stainless steel handle is interchangeable with commercial handle option
- Clean Indicator Alert
- Drain required; unit ships with a factory installed drain line to ensure proper installation and optimal performance
- Order with or without our enhanced and quieter P60 drain pump

Leisure On Board.

For over five decades and three generations, U-Line continues to be known for innovation, clean lines and understated elegance. U-Line takes ice making, refrigeration and freezers to yet another environment. Our Marine/ RV Series Models feature durability and good looks, as well as exceptional ice production and refrigeration capacity, for use above and below deck. The corrosive-resistant, stainless steel hinges and fasteners on the durable and UV resistant cabinet and doors, combine maximum convenience with durability and good looks.

All U-Line Marine ice makers use less than 3 gallons of water to produce up to 25 lbs of ice, so you'll never run out of ice with a minimal impact on fresh water reserves. No drain is required and every U-Line Marine ice maker comes with a positive catch door latch or travel pin; ready for the open sea or for storage.

1983 First 12 Volt DC Ice Maker

Shown in image: U-Line SS1095 Stainless Marine Ice Maker

	SS1095	SS98	BI95BTP	WH95TP	SP18	CO29	75F
Maximum Daily Ice Production / Storage (lbs)	23 / 12	25 / 25	23 / 12	23 / 12	23 / 12	18 / 13	N/A
Ice Cube Type	Crescent	Crescent	Crescent	Crescent	Crescent	Crescent	N/A
Refrigerator / Freezer Capacity (Cu. Ft.)	N/A	N/A	N/A	N/A	N/A	2.1	5.4
Available Finishes	Stainless	Stainless	Black	White	Black, White	Black, White	Black, White
Cabinet Outer Shell	Stainless steel	Stainless steel	Vinyl coated	Vinyl coated	Vinyl coated	Vinyl coated	Vinyl coated
Door Swing Options	Reversible	Reversible	Reversible	Reversible	Reversible	Reversible	Reversible
Travel Latch / Pin	Travel latch	Travel pin	Travel pin	Travel pin	Travel pin	Travel pin	
Panel Integration Options		1/4" insert	1/4" insert		1/4" insert black only	1/4" insert black only	1/4" insert
Mounting Flange	3 flange options		Flush to cabinet	Flush to cabinet	Flush to cabinet		
Marine Grade Hardware	Corrosion resistant	Corrosion resistant	Corrosion resistant	Corrosion resistant	Corrosion resistant	Corrosion resistant	
In-Door Storage Bins	N/A	N/A	N/A	N/A	N/A	2	2
Tempered Glass Shelves	N/A	N/A	N/A	N/A	N/A	2 - glass shelves	3 - glass shelves
Defrost Technology	Manual	Manual	Manual	Manual	Manual	Manual	Manual
220 Volt Model Available	Yes	Yes	Yes	Yes	Yes	Yes	Yes

Other models available for Marine/RV environment are the U-Line 29R, 1115R, 1175R, CO1175, 2115RSOD, BI2115SOD, 2275DWRC, 2175RSOD, 3018RF, 3024RF and 3036RR.

Visit u-line.com to download our Marine/RV brochure.

SS1095

- Daily crescent ice rate – up to 23 lbs
- Ice storage capacity – up to 12 lbs
- Manual defrost
- Positive catch door latch
- Multiple flange options
- SS1095NF - no flange, can freestand
- SS1095FC - 1/2" mounting flange flush to cabinet
- SS1095FD - 1/2" mounting flange flush to door
- Field reversible door with zero clearance door swing

Stainless
(flush to cabinet flange)

Stainless
(flush to door flange)

Stainless
(no flange)

SS98

- Daily crescent ice rate – up to 25 lbs
- Ice storage capacity – up to 25 lbs
- Manual defrost
- Uses under 3 gallons of water to produce 25 lbs of ice
- Field reversible door with zero clearance door swing
- Corrosion and UV resistant components
- Accepts 1/4" insert panel
- Travel pin included

Stainless

BI95BTP

- Daily crescent ice rate – up to 23 lbs
- Ice storage capacity – up to 12 lbs
- Manual defrost
- Uses under 3 gallons of water to produce 25 lbs of ice
- 1/2" wide mounting flange flush to cabinet
- Corrosion and UV resistant components
- Accepts 1/4" insert panel
- Travel pin included
- Field reversible door with zero clearance door swing

WH95TP

- Daily crescent ice rate – up to 23 lbs
- Ice storage capacity – up to 12 lbs
- Manual defrost
- Uses under 3 gallons of water to produce 25 lbs of ice
- 1/2" wide mounting flange
- Corrosion and UV resistant components
- Travel pin included
- Field reversible door with zero clearance door swing

Ready to Serve

The SS1095 produces up to 23 lbs of ice daily in a sleek corrosive resistant stainless steel package with three flange options.

SP18

- Daily crescent ice rate – up to 23 lbs
- Ice storage capacity – up to 12 lbs
- Manual defrost
- Uses under 3 gallons of water to produce 25 lbs of ice
- Field reversible door with zero clearance door swing
- Black model accepts 1/4" insert panel
- 1/2" wide mounting flange
- Corrosion and UV resistant components
- Travel pin included

Black

White

CO29

- Refrigeration capacity – 2.1 cubic feet
- Daily crescent ice rate – up to 18 lbs
- Ice storage capacity – up to 13 lbs
- Mechanically controlled passive cooling system
- Manual defrost
- Uses under 3 gallons of water to produce 25 lbs of ice
- Corrosion and UV resistant components
- Anodized aluminum door handle and frame on white model
- Travel pin included
- Black model accepts 1/4" insert panel
- Underwriters Laboratory (UL) Residential and Commercial Listing

Black

White

75F

- Freezer capacity – 5.7 cubic feet
- Mechanically control
- Manual defrost
- Models will accept a 1/4" insert panel
- Optional door lock
- Three tempered glass shelves and two door bins
- Freezer temperature: 0 - 5˚F
- Field reversible door with zero clearance door swing
- Underwriters Laboratory (UL) Residential and Commercial Listing

Black

White

Galleys and Salons

We offer a full complement of models especially for indoor environments like galleys and salons. This includes refrigerator drawers and full overlay options.

The Ultimate in Personalized Point-Of-Use Refrigeration

Expand the possibilities with U-Line 36" Custom Models. The 36" Custom Flange Kit will allow for the creation of a personalized configuration of two 18" units, and have it install seamlessly. With the U-Line Custom Ice Flange Kit, it is possible to add a Modular 3000 Series 18" Clear Ice Machine to another 18" model for a customized 36" application. This allows for a greater degree of personalized applications including the combination of a solid door and glass door model.

36" Custom Models

Shown in image:
36" Refrigerator / Clear Ice Machine
(3018RF and 3018CLR Stainless Models and Custom Ice Flange Kit)

36" MODELS UTILIZING THE FLANGE KIT

36" Wine Captain® Model / Refrigerator

The perfect centerpiece of any kitchen is a 3018WC Wine Captain® Model matched with a 3018RF Refrigerator.

36" Glass Door Refrigerator / Refrigerator

Pair a 3018RGL Glass Door Refrigerator with a 3018RF Refrigerator for the best of both worlds.

36" MODELS UTILIZING THE ICE FLANGE KIT

36" Refrigerator / Clear Ice Machine

A 3018RF Refrigerator is a perfect companion to a 3018CLR Clear Ice Machine.

36" Wine Captain® Model / Clear Ice Machine

Combine a 3018WC Wine Captain® Model when it's time to uncork that perfect cabernet with a 3018CLR Clear Ice Machine for cocktail hour.

36" Glass Door Refrigerator / Clear Ice Machine

A 3018RGL Glass Door Refrigerator with a 3018CLR Clear Ice Machine is the perfect combination for entertaining friends and family.

Specifications at a Glance

	WINE CAPTAIN® MODELS			BEVERAGE CENTERS		ICE MACHINE
	3018WC	3024WC	3036WCWC	3024BEV	3036BVWC	3018CLR
Height (A) inches (mm)	33-11/16" (856)	33-11/16" (856)	33-11/16" (856)	33-11/16" (856)	33-11/16" (856)	33-11/16" (856)
Width (B) inches (mm)	17-3/4" (450)	23-5/8" (600)	35-7/16" (900)	23-5/8" (600)	35-7/16" (900)	17-3/4" (450)
Depth with door (C)† inches (mm)	23-7/16" (590)	23-7/16" (590)	23-7/16" (590)	23-7/16" (590)	23-7/16" (590)	24" (610)
Wine Bottle Capacity (.75L)	Up to 31	Up to 43	Up to 62	Up to 11	Up to 31	N / A
12-oz bottle / 12-oz can capacity	N / A	N / A	N / A	42 / 126	60 / 127	N / A
Overall Capacity (Cu. Ft.)	N / A	N / A	N / A	4.7 Overlay / 4.9 Stainless	6.9 Overlay / 7.1 Stainless	N / A
Tempered Glass Shelves / Storage Bins	N / A	N / A	N / A	3 Shelves	4 Shelves	N / A
Crisper Drawer	N / A	N / A	N / A	N / A	1	N / A
Lock Model Available	Stainless Model	N / A	Stainless Model	N / A	Stainless Model	N / A
Temperature Management System	Digitally Controlled Single Zone	Digitally Controlled Single Zone	Digitally Controlled Dual Zone	Digitally Controlled Single Zone	Digitally Controlled Dual Zone	Digitally Controlled Single Zone
Run amps	2.4	2.4	2.4	2.4	2.4	4.0
Approx. shipping weight (overlay)	133 lbs	153 lbs	236 lbs	150 lbs	234 lbs	116 lbs w/pump- 110 lbs w/o pump
Approx. shipping weight (stainless)	139 lbs	156 lbs	250 lbs	155 lbs	244 lbs	124 lbs w/pump- 118 lbs w/o pump
ENERGY STAR® / CEE Rating						

Specifications subject to change without notice. Sizes are for reference only. For detailed cut-out, installation and panel specifications and use & care information, visit u-line.com.

U-LINE SPECIFICATIONS

Visit u-line.com and select a specific product to download complete specifications and use & care information:

- Use & Care Guide
- Installation Guide
- Specifications, Features and Benefits
- CAD Files
- Overlay Panels
- Compliance Documentation

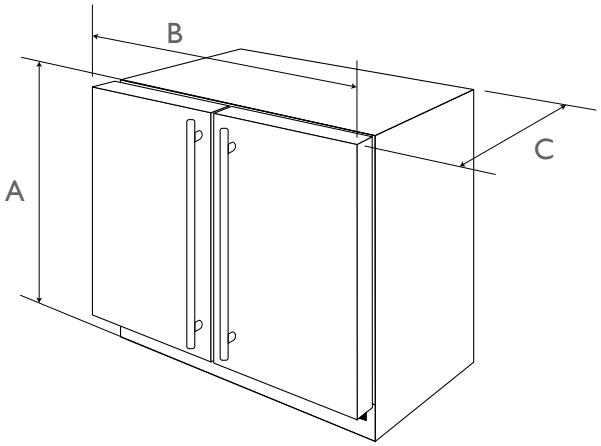

† Overlay depth dimensions are the same as stainless models once a 3/4" overlay panel or frame is applied.

Specifications at a Glance

	GLASS DOOR REFRIGERATORS			REFRIGERATORS		
	3018RGL	3024RGL	3036RRGL	3018RF	3024RF	3036RR
Height (A) inches (mm)	33-11/16" (856)	33-11/16" (856)	33-11/16" (856)	33-11/16" (856)	33-11/16" (856)	33-11/16" (856)
Width (B) inches (mm)	17-3/4" (450)	23-5/8" (600)	35-7/16" (900)	17-3/4" (450)	23-5/8" (600)	35-7/16" (900)
Depth with door (C)[1] inches (mm)	23-7/16" (590)	23-7/16" (590)	23-7/16" (590)	23-7/16" (590)	23-7/16" (590)	23-7/16" (590)
Wine Bottle Capacity (.75L)	N / A	N / A	N / A	N / A	N / A	N / A
12-oz bottle / 12-oz can capacity	60 / 127	84 / 168	120 / 254	36 / 84	63 / 114	72 / 168
Overall Capacity (Cu. Ft.)	3.4 Overlay / 3.6 Stainless	4.7 Overlay / 4.9 Stainless	6.7 Overlay / 7.1 Stainless	3.4	4.8	6.8
Tempered Glass Shelves / Storage Bins	4 Shelves	4 Shelves	8 Shelves	3 Bins	3 Bins	6 Bins
Crisper Drawer	1	1	2	N / A	N / A	N / A
Lock Model Available	Stainless Model	N / A	Stainless Model	N / A	N / A	N / A
Temperature Management System	Digitally Controlled Single Zone	Digitally Controlled Single Zone	Digitally Controlled Dual Zone	Digitally Controlled Single Zone	Digitally Controlled Single Zone	Digitally Controlled Dual Zone
Run amps	2.4	2.4	2.4	2.4	2.4	2.4
Approx. shipping weight (overlay)	117 lbs	150 lbs	216 lbs	116 lbs	140 lbs	200 lbs
Approx. shipping weight (stainless)	128 lbs	155 lbs	228 lbs	124 lbs	147 lbs	220 lbs
ENERGY STAR® / CEE Rating				ENERGY STAR® / Tier 3	ENERGY STAR® / Tier 1	

Specifications subject to change without notice. Sizes are for reference only. For detailed cut-out, installation and panel specifications and use & care information, visit u-line.com.

CUSTOMER CARE - SERVICE

Hours of Operation: Monday - Friday 8:00 am to 5:30 pm CST
Website: u-line.com
Email: onlineservice@u-line.com
Phone: 800-779-2547
Fax: 414-354-5696

To assist you most efficiently, have your model and serial number available.

Serial Number Format:

13 14862 - 05 - 0527

Year | Factory use only | Month | Factory use only

Designed, Engineered and Assembled in WI, USA

Specifications at a Glance

	WINE CAPTAIN® MODELS						BEVERAGE CENTERS			GLASS DOOR REFRIGERATORS		REFRIGERATORS			
	1075WC	1115WC	1175WC	2115WC	2175WCC	2275ZWC	1075BEV	1175BEVSS	2175BEVC	2175RCG	ADA24RGL	1115R	1175R	2115R/ 2115RSOD	2175RC/ 2175SOD
Height (A)	34-1/8"	34-1/8"	34-1/8"	34-1/8"	34-1/8"	34-1/8"	34-1/8"	34-1/8"	34-1/8"	34-1/8"	32"	34-1/8"	34-1/8"	34-1/8"	34-1/8"
Width (B)	23-15/16"	14-15/16"	23-15/16"	15"	23-15/16"	23-15/16"	23-15/16"	23-15/16"	23-15/16"	23-15/16"	24"	14-15/16"	23-15/16"	15"	23-15/16"
Depth with door (C)	23-1/4"	23-1/8"	23-1/2"	23-1/4"	23-3/16"	23-3/16"	23-1/4"	23-1/4"	23-1/4"	23-3/16"	23-1/2"	22-7/8"	23-1/4"	23-1/4"	23"
Depth with waterline (C)															
ADA height compliant											Yes				
Available 220/230V 50/60Hz CE mark model															
Run amps	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4
Approx. shipping weight (black / white)		99 lbs	129 lbs	106 lbs	141 lbs	143 lbs			133 lbs	135 lbs	122 lbs	81 lbs	107 lbs	89 lbs	123 lbs
Approx. shipping weight (stainless)	135 lbs	102 lbs	134 lbs	111 lbs	146 lbs	146 lbs	124 lbs	125 lbs	136 lbs	138 lbs	126 lbs	83 lbs	110 lbs	88 lbs	120 lbs
ENERGY STAR®/ CEE Rating													ENERGY STAR®/ Tier 3		ENERGY STAR®/ Tier 3

Specifications subject to change without notice. Sizes are for reference only. For detailed cut-out, installation and panel specifications and use & care information, visit u-line.com.

U-LINE SPECIFICATIONS

Visit u-line.com and select a specific product to download complete specifications and use & care information:

- Use & Care Guide
- Installation Guide
- Specifications, Features and Benefits
- CAD Files
- Overlay Panels
- Compliance Documentation

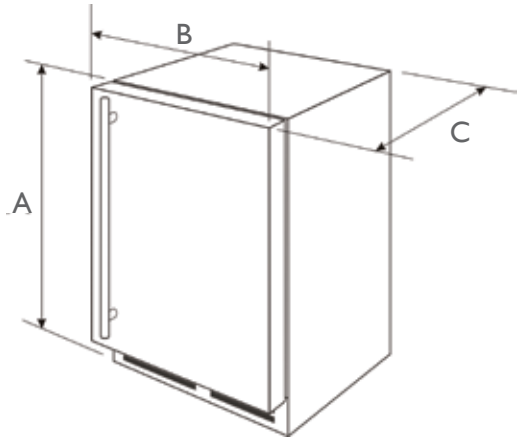

REFRIGERATORS			ICE MAKERS				ICE MACHINES	COMBO® MODELS						
2275DWRC	29R	ADA24R	BI95	BI98	ADA151M	BI2115/ BI2115SOD	CLR2160/ CLR2160SOD	CO29	CO29F	CO1175	CO2175F	2175RF	CLRCO2175	C2275DWR
33-7/8"	28-1/2"	32"	25-1/16"	27-7/16"	32"	34-1/8"	34-1/8"	28-1/2"	28-1/2"	34-1/8"	34-1/8"	34-1/8"	34-1/8"	33-7/8"
23-15/16"	20-13/16"	24"	14"	14-15/16"	15"	15"	15"	20-13/16"	20-13/16"	23-15/16"	23-15/16"	23-15/16"	23-15/16"	23-15/16"
23-3/8"	23"	23-1/4"	17 "	20"	23"	23-3/16"	23-3/16"	23"	23"	23-1/4"	23"	23"	23"	23-3/8"
			18-1/2"	21-1/2"	23-3/4"	23-13/16"	23-15/16"	23-15/16"	23-15/16"	23-7/16"	23-3/16"		23-3/4"	23-5/8"
	Yes	Yes	Yes	Yes	Yes			Yes	Yes					
			Yes	Yes		Yes		Yes		Yes				
2.4	2.4	2.4	2.5	2.5	2.5	2.5	4.0	2.5	2.5	2.5	2.5	2.5	4.0	2.5
144 lbs	89 lbs	115 lbs	61 lbs	74 lbs	83 lbs	91 lbs	105 lbs w/pump- 99 lbs w/o pump	97 lbs	103 lbs	118 lbs	134 lbs	128 lbs	147 lbs w/pump- 141 lbs w/o pump	148 lbs
151 lbs		117 lbs			84 lbs	90 lbs	105 lbs w/pump- 98 lbs w/o pump			118 lbs	130 lbs	125 lbs	143 lbs w/pump- 137 lbs w/o pump	155 lbs
	ENERGY STAR®/ Tier 1	ENERGY STAR®/ Tier 3												

Specifications subject to change without notice. Sizes are for reference only. For detailed cut-out, installation and panel specifications and use & care information, visit u-line.com.

U-LINE WARRANTY

FULL ONE YEAR WARRANTY (TWO YEARS ON MODULAR 3000 SERIES)

From the date of purchase, U-Line covers all parts and labor to repair or replace any product, sold and serviced within the United States and Canada, which proves to be defective in materials or workmanship.

FULL FIVE YEAR WARRANTY

From the date of purchase, U-Line covers all parts and labor to repair or replace any components that prove to be defective in the sealed system (consisting of the compressor, condenser, evaporator, bypass valve, the dryer and connecting tube) for all products sold and serviced within the United States and Canada. Visit u-line.com for complete warranty details.

U-LINE
RIGHT PRODUCT. RIGHT PLACE. RIGHT TEMPERATURE.®
DESIGNED, ENGINEERED AND ASSEMBLED IN WI, USA
P/N ZLITIM **01/2013** © U-LINE Corporation u-line.com